



**EMERGENCY LIGHT
EMERGENCY EXIT SIGNS**



TWINLIGHT EMERGENCY LIGHT

- 60-180 min. time in case of Emergency
- Maintenance-free dry type battery
- 3.5 mm ABS product casing and headlight set
- Charger LED
- Test Button
- Battery Turn on/off Button
- Carrying Handle
- 220V Plug-in
- Adjustable Headlights
- Fixed and mobile usability
- Provides proper illumination in a wide area of use such as long corridors, stairways, parking lots and factories.
- Spot fixtures step in automatically only in cases of power cut.
- Production with Led. (5630 Led)
- Led 6500K
- CE , ISO 9001:2015 Certificate
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standards.



MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
ZBS-70180	ON EMERGENCY	180 MIN.	2x14F LED 2x9 WATT	2x650 LM	40	100X300X295 mm	-10 / +60°C	3,5 W	220-240 V
ZBS-07560	ON EMERGENCY	60 MIN.	2x30 F LED 2x15 WATT	2x1000 LM	40	100X300X295 mm	-10 / +60°C	3,5 W	220-240 V
ZBS-075180	ON EMERGENCY	180 MIN.	2x30 F LED 2x15 WATT	2x1000 LM	40	100X300X295 mm	-10 / +60°C	3,5 W	220-240 V





TWINLIGHT EMERGENCY LIGHT

- 180 min. time in case of Emergency
- Maintenance-free dry type battery
- 3.5 mm ABS product casing and headlight set
- Charger LED
- Test Button
- Battery Turn on/off Button
- Carrying Handle
- 220V Plug-in
- Adjustable Headlights
- Fixed and mobile usability

- Provides proper illumination in a wide area of use such as long corridors, stairways, parking lots and factories.
- Spot fixtures step in automatically only in cases of power cut.
- Production with Led. (with 50 degree lens)
- Led 6500K
- CE , ISO 9001:2015 Certificate
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standards.



MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
ZBS-5180	ON EMERGENCY	180 MIN.	2x9 F LED 2x5 WATT	2x350 LM	40	100X300X295 mm	-10 / +60°C	3,5 W	220-240 V
ZBS-10180	ON EMERGENCY	180 MIN.	2x9 F LED 2x10 WATT	2x700 LM	40	100X300X295 mm	-10 / +60°C	3,5 W	220-240 V





TWINLIGHT-MIDI EMERGENCY LIGHT

- 180 min. time in case of Emergency
- Maintenance-free dry type battery
- 3 mm Plastic product casing and headlight set
- Charger LED
- Test Button
- Battery Turn on/off Button
- Carrying Handle
- 220V Plug-in
- Adjustable Headlights
- Fixed and mobile usability
- Provides proper illumination in a wide area of use such as long corridors, stairways, parking lots and factories.
- Spot fixtures step in automatically only in cases of power cut.
- Production with Led. (with 50 degree lens)
- Led 6500K
- CE , ISO 9001:2015 Certificate
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standards.



MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
ZBS-90180	ON EMERGENCY	180 MIN.	2x9 F LED 2x5 WATT	2x350 LM	40	85X248X257 mm	-10 / +60°C	3,5 W	220-240 V
ZBS-91180	ON EMERGENCY	180 MIN.	2x9 F LED 2x10 WATT	2x700 LM	40	85X248X257 mm	-10 / +60°C	3,5 W	220-240 V





TWINLIGHT-IP65 EMERGENCY LIGHT

- 180 min. time in case of Emergency
- Maintenance-free dry type battery
- 3 mm Plastic product casing and headlight set
- Charger LED
- Test Button
- Battery Turn on/off Button
- Carrying Handle
- 220V Plug-in
- Adjustable Headlights
- Fixed and mobile usability

- Provides proper illumination in a wide area of use such as long corridors, stairways, parking lots and factories.
- Spot fixtures step in automatically only in cases of power cut.
- Production with Led. (with 50 degree lens)
- Led 6500K
- CE , ISO 9001:2015 Certificate
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standards.



MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
MIDI-IP65-5	ON EMERGENCY	180 MIN.	2x9 F LED 2x5 WATT	2x350 LM	65	85X248X257 mm	-10 / +60°C	3,5 W	220-240 V
MIDI-IP65-10	ON EMERGENCY	180 MIN.	2x9 F LED 2x10 WATT	2x700 LM	65	85X248X257 mm	-10 / +60°C	3,5 W	220-240 V





SAFELIGHT EMERGENCY LIGHT

- 90-180 min. time in case of Emergency
- Maintenance-free dry type battery
- Electrostatic powder paint sheet metal case and sheet metal caseheadlight
- Charger LED
- Test Button
- 220V Plug-in
- Battery Turn on/off Button
- Battery level indicator
- Adjustable Headlights
- Fixed and mobile usability

- Provides proper illumination in a wide area of use such as long corridors, stairways, parking lots and factories.
- Spot fixtures step in automatically only in cases of power cut.
- Production with Led. (5630 Led)
- Led 6500 Kelvin
- CE , ISO 9001:2015 Certificate
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standards.




MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
SF-11060	ON EMERGENCY	90 MIN.	2x18 F LED 2x9 WATT	2x650 LM	40	80X310X275 mm	-10 / +60°C	3,5 W	220-240 V
SF-11180	ON EMERGENCY	180 MIN.	2x18 F LED 2x9 WATT	2x650 LM	40	80X310X275 mm	-10 / +60°C	3,5 W	220-240 V
SF-11212	ON EMERGENCY	120 MIN.	3x18 F LED 3x9 WATT	3x650 LM	40	80X310X275 mm	-10 / +60°C	3,5 W	220-240 V





SAFELIGHT

EMERGENCY LIGHT

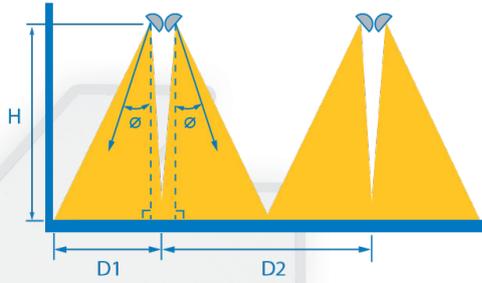

Model	Height (h)	Angle	D1 (m)	D2 (m)
2x18 Led	3.00 m	45	8.00	16.00
2x18 Led	4.00 m	40	9.00	18.00
2x36 Led	3.00 m	45	13.00	26.00
2x36 Led	4.00 m	40	14.00	28.00



MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
SF-3600-1	ON EMERGENCY	180 MIN.	2x36 F LED 2x18 WATT	2x1300 LM	40	80X310X275 mm	-10 / +60°C	3,5 W	220-240 V
SF-3600-4	ON EMERGENCY	60 MIN.	2x36 F LED 2x18 WATT	2x1300 LM	40	80X310X275 mm	-10 / +60°C	3,5 W	220-240 V





SAFELIGHT-ECO

EMERGENCY LIGHT

- 90-180 min. time in case of Emergency
- Maintenance-free dry type battery
- Electrostatic powder paint sheet metal case and sheet ABS caseheadlight
- Charger LED
- Test Button
- 220V Plug-in
- Battery Turn on/off Button
- Battery level indicator
- Adjustable Headlights
- Fixed and mobile usability
- Provides proper illumination in a wide area of use such as long corridors, stairways, parking lots and factories.
- Spot fixtures step in automatically only in cases of power cut.
- Production with Led. (5630 Led)
- Led 6500 Kelvin
- CE , ISO 9001:2015 Certificate
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standards.



MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
SF-ECO 18060	ON EMERGENCY	60 MIN.	2x18 F LED 2x9 WATT	2x650 LM	40	80X310X275 mm	-10 / +60°C	3,5 W	220-240 V
SF-ECO 18180	ON EMERGENCY	180 MIN.	2x18 F LED 2x9 WATT	2x650 LM	40	80X310X275 mm	-10 / +60°C	3,5 W	220-240 V
SF-ECO 7560	ON EMERGENCY	60 MIN.	2x30 F LED 2x15 WATT	2x1000 LM	40	80X310X275 mm	-10 / +60°C	3,5 W	220-240 V
SF-ECO 75180	ON EMERGENCY	180 MIN.	2x30 F LED 2x15 WATT	2x1000 LM	40	80X310X275 mm	-10 / +60°C	3,5 W	220-240 V
SF-ECO 75320	ON EMERGENCY	120 MIN.	3x30 F LED 3x15 WATT	3x1000 LM	40	80X310X275 mm	-10 / +60°C	3,5 W	220-240 V





SAFELIGHT IP65 EMERGENCY LIGHT

- 180 min. time in case of Emergency
- Maintenance-free dry type battery
- ABS product casing
- IP67 Headlight set
- Charger LED
- Test Button
- Battery Turn on/off Button
- Carrying Handle
- 220V Plug-in
- Adjustable Headlights
- Fixed and mobile usability

- Provides proper illumination in a wide area of use such as long corridors, stairways, parking lots and factories.
- Spot fixtures step in automatically only in cases of power cut.
- Production with Power Led 2X9 (2X15 Watt)
- Led 6500K
- CE , ISO 9001:2015 Certificate
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standards.



MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
SF-IP 65	ON EMERGENCY	180 MIN.	2x9 PW. LED 2x15 WATT	2x1000 LM	65	475X280X130 mm	-10 / +60°C	6 W	220-240 V





TWINLIGHT POWER EMERGENCY LIGHT

- 180 min. time in case of Emergency
- Maintenance-free dry type battery
- 3.5 mm ABS product casing
- IP67 Headlight set
- Charger LED
- Test Button
- Battery Turn on/off Button
- Carrying Handle
- 220V Plug-in
- Adjustable Headlights
- Fixed and mobile usability
- Provides proper illumination in a wide area of use such as long corridors, stairways, parking lots and factories.
- Spot fixtures step in automatically only in cases of power cut.
- Production with Power Led 2X9 (2X15 Watt)
- Led 6500K
- CE , ISO 9001:2015 Certificate
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standards.



MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
TWINLIGHT POWER2700-1	ON EMERGENCY	180 MIN.	2x9 PW. LED 2x15 WATT	2x1000 LM	40	100X300X295 mm	-10 / +60°C	6 W	220-240 V





SAFELIGHT POWER EMERGENCY LIGHT

- 180 min. time in case of Emergency
- Maintenance-free dry type battery
- Electrostatic powder paint sheet metal case and sheet metal caseheadlight
- Adjustable Headlights
- IP67 Headlight set
- Charger LED
- Battery Turn on/off Button
- Carrying Handle
- Battery level indicator
- Test Button
- 220V Plug-in

- Fixed and mobile usability
- Provides proper illumination in a wide area of use such as long corridors, stairways, parking lots and factories.
- Spot fixtures step in automatically only in cases of power cut.
- Production with Power Led 2X9 (2X15 Watt)
- Led 6500K
- CE , ISO 9001:2015 Certificate
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standards.



MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
SFPOWER 2700-2	ON EMERGENCY	180 MIN.	2x9 PW. LED 2x15 WATT	2x1000 LM	40	80X310X275 mm	-10 / +60°C	6 W	220-240 V





DEEP-LIGHT EMERGENCY LIGHT

- 180 min. time in case of Emergency
- Electrostatic powder paint sheet metal case
- Flush mounting
- Maintenance-free dry type battery
- Charger LED
- Test Button
- Light Power 650 Lumens (Led)
- Decorative Products for Suspended Ceiling Applications

- Transparent diffuser cover
- Production with Led.
- Led 6500K
- Provides proper illumination in a wide area of use such as long corridors, stairways, parking lots and factories.
- ISO 9001:2015 , CE Certificate
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standards.



MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
DP-LED 5630	ON EMERGENCY	180 MIN.	18 F LED 9 WATT	650 LM	20	355X95X90 mm	-10 / +60°C	1 W	220-240 V





Z-LITE EMERGENCY LIGHT

- 60-180 min. time in case of Emergency
- Ni-Cd Battery
- ABS product casing
- Transparent diffuser cover (UV)
- Charger LED
- Test Button (Optional)
- Constantly light - Emergency light
- CE , ISO 9001:2015 Certificate

- Provides proper illumination in a wide area of use such as long corridors, stairways, parking lots and factories.
- Spot fixtures step in automatically only in case of power cut.
- Production with Led. (2835-5630 Led)
- Led 6500K
- Led 2835 300Lm-600Lm-1000Lm
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standards.



MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
Z-LITE A-1801	ON EMERGENCY	180 MIN.	20 F LED	300 LM	40	336X136X48 mm	-10 / +60°C	1 W	220-240 V
Z-LITE A-1803	ON EMERGENCY	180 MIN.	40 F LED	600 LM	40	336X136X48 mm	-10 / +60°C	1 W	220-240 V
Z-LITE A-2000	ON EMERGENCY	180 MIN.	40 F LED	1000 LM	40	336X136X48 mm	-10 / +60°C	2 W	220-240 V
Z-LITE A-2001	ON EMERGENCY	60 MIN.	40 F LED	1000 LM	40	336X136X48 mm	-10 / +60°C	2 W	220-240 V
Z-LITE flush mounted apparatus	--	--	--	--	--	--	--	--	--





SAFELIGHT IP65

EMERGENCY LIGHT

- 180 min. time in case of Emergency
- Maintenance-free dry type battery
- Made in Germany product casing
- IP67 Headlight set
- Charger LED
- Test Button
- Battery Turn on/off Button
- Carrying Handle
- 220V Plug-in
- Adjustable Headlights
- Fixed and mobile usability
- Provides proper illumination in a wide area of use such as long corridors, stairways, parking lots and factories.
- Spot fixtures step in automatically only in cases of power cut.
- Production with Power Led 2X9 (2X15 Watt)
- Led 6500K
- CE , ISO 9001:2015 Certificate
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standards.



MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
HS-IP 65	ON EMERGENCY	180 MIN.	2x9 PW. LED 2x15 WATT	2x1000 LM	65	335X295X125 mm	-10 / +60°C	6 W	220-240 V





Z-LITE EMERGENCY LIGHT

- 180 min. time in case of Emergency
- Nicd type battery
- Aluminum product casing
- Charger LED
- Test Button
- Self-Test
- 220V
- Fixed usability
- Flush mounting

- Provides proper illumination in a wide area of use such as corridors, stairways, parking lots and office.
- Spot fixtures step in automatically only in cases of power cut.
- Production with Led. (Power Led)
- Led 6500K
- CE , ISO 9001:2015 Certificate
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standards.



MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
Z-LITE SPOT	ON EMERGENCY	180 MIN.	POWER LED 2 WATT	300 LM	20	95X95X17 mm	-10 / +60°C	1 W	220-240 V





S-LITE EMERGENCY EXIT SIGNS

- 180 min. time in case of Emergency
- Production with Led.
- Ni-Cd Battery
- Chained and Fitting Model
- Under plaster mounting
- Ceiling and Wall Type
- Designed for routings that can be used in ceilings, walls and overhead door applications conforming to standards.

- 2,8-4,8 mm transparent plexiglass diffuser was used.
- The case is made of aluminum and the side covers are made of ABS, there are white and grey options for the case.
- Charger LED
- Test Button
- CE , ISO 9001:2015 Certificate
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standarts.




MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
26180	CONTINUOUS & EMERGENCY	180 MIN.	8 F LED	120 LM	20	260X195X40 mm	-10 / +60°C	1 W	220-240 V
30180	CONTINUOUS & EMERGENCY	180 MIN.	10 F LED	150 LM	20	300X215X40 mm	-10 / +60°C	1 W	220-240 V
39180	CONTINUOUS & EMERGENCY	180 MIN.	16 F LED	240 LM	20	400X255X40 mm	-10 / +60°C	1 W	220-240 V
45180	CONTINUOUS & EMERGENCY	180 MIN.	18 F LED	270 LM	20	455X255X40 mm	-10 / +60°C	1 W	220-240 V





S-LITE EMERGENCY EXIT SIGNS

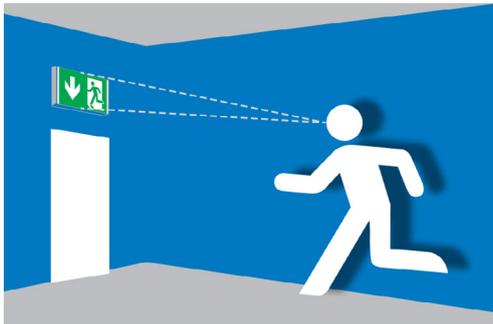

Model	Height (h)	Usable Distance
26 cm	2.00 m	24.00 m
30 cm	2.00 m	28.00 m
39 cm	2.00-4.00 m	34.00 m
45 cm	2.00-4.00 m	38.00 m

MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
26180-ECO	CONTINUOUS & EMERGENCY	180 MIN.	8 F LED	120 LM	20	260X195X40 mm	-10 / +60°C	1 W	220-240 V
30180-ECO	CONTINUOUS & EMERGENCY	180 MIN.	10 F LED	150 LM	20	300X215X40 mm	-10 / +60°C	1 W	220-240 V
26 CM Flush mounted apparatus	--	--	--	--	--	260X195X40 mm	--	--	--
30 CM Flush mounted apparatus	--	--	--	--	--	300X215X40 mm	--	--	--





Z-LITE EMERGENCY EXIT SIGNS

- 60-180 min. time in case of Emergency
- Ni-Cd Battery
- ABS product casing
- Transparent diffuser cover (UV)
- Charger LED
- Test Button (Optional)
- Constantly light - Emergency light
- CE , ISO 9001:2015 Certificate

- Provides proper illumination in a wide area of use such as long corridors, stairways, parking lots and factories.
- Spot fixtures step in automatically only in case of power cut.
- Production with Led. (2835-5630 Led)
- Led 6500K
- Led 2835 300Lm-600Lm-1000Lm
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standart.




MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
Z-LITE S-1901	CONTINUOUS & EMERGENCY	180 MIN.	20 F LED	300 LM	40	336X136X48 mm	-10 / +60°C	1 W	220-240 V
Z-LITE S-1903	CONTINUOUS & EMERGENCY	180 MIN.	40 F LED	600 LM	40	336X136X48 mm	-10 / +60°C	1 W	220-240 V
Z-LITE S-3000	CONTINUOUS & EMERGENCY	180 MIN.	40 F LED	1000 LM	40	336X136X48 mm	-10 / +60°C	2 W	220-240 V
Z-LITE S-3001	CONTINUOUS & EMERGENCY	60 MIN.	40 F LED	1000 LM	40	336X136X48 mm	-10 / +60°C	2 W	220-240 V
Z-LITE Flush mounted apparatus	--	--	--	--	--	--	--	--	--





S-BOX EMERGENCY EXIT SIGNS

- 60-180 min. time in case of Emergency
- Production with Led.
- Ni-Cd Battery
- 3-position mounting
- Electrostatic powder paint sheet metal case
- One-Sided and Double-Sided Production

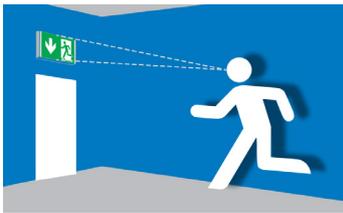

- Designed for routings that can be used in ceilings, walls and overhead door applications conforming to standards.
- Charger LED
- Test Button
- CE , ISO 9001:2015 Certificate
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standarts.

Model	Height (h)	Usable Distance
S-Box 30 cm	2.00 m	28.00 m
Z-Lite	2.00 m	26.00 m



MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
S-BOX 30180 Double-Sided	CONTINUOUS & EMERGENCY	60 MIN.	40 F LED	500 LM	40	300X170X65 mm	-10 / +60°C	1 W	220-240 V
S-BOX 30180 Double-Sided	CONTINUOUS & EMERGENCY	180 MIN.	40 F LED	500 LM	40	300X170X65 mm	-10 / +60°C	1 W	220-240 V
S-BOX 30180 One-Sided	CONTINUOUS & EMERGENCY	60 MIN.	40 F LED	500 LM	40	300X170X65 mm	-10 / +60°C	1 W	220-240 V
S-BOX 30180 One-Sided	CONTINUOUS & EMERGENCY	180 MIN.	40 F LED	500 LM	40	300X170X65 mm	-10 / +60°C	1 W	220-240 V





S-BOX EMERGENCY EXIT SIGNS

- 180 min. time in case of Emergency
- Production with Led.
- Ni-Cd Battery
- Electrostatic powder paint sheet metal case
- Ceiling and Wall Type
- One-Sided and Double-Sided Production
- Charger LED

- Designed for routings that can be used in ceilings, walls and overhead door applications conforming to standards.
- Test Button
- CE , ISO 9001:2015 Certificate
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standart.




MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
41060 One-Sided	CONTINUOUS & EMERGENCY	60 MIN.	40 F LED	600 LM	40	400X250X65 mm	-10 / +60°C	1 W	220-240 V
41180 One-Sided	CONTINUOUS & EMERGENCY	180 MIN.	40 F LED	600 LM	40	400X250X65 mm	-10 / +60°C	1 W	220-240 V
41060 Double-Sided	CONTINUOUS & EMERGENCY	60 MIN.	40 F LED	1000 LM	40	400X250X65 mm	-10 / +60°C	3 W	220-240 V
41180 Double-Sided	CONTINUOUS & EMERGENCY	180 MIN.	40 F LED	1000 LM	40	400X250X65 mm	-10 / +60°C	3 W	220-240 V
48180 One-Sided	CONTINUOUS & EMERGENCY	60 MIN.	40 F LED	1000 LM	40	490X275X80 mm	-10 / +60°C	3 W	220-240 V
48180 One-Sided	CONTINUOUS & EMERGENCY	180 MIN.	40 F LED	1000 LM	40	490X275X80 mm	-10 / +60°C	3 W	220-240 V
48180 Double-Sided	CONTINUOUS & EMERGENCY	60 MIN.	40 F LED	1000 LM	40	490X275X80 mm	-10 / +60°C	3 W	220-240 V
48180 Double-Sided	CONTINUOUS & EMERGENCY	180 MIN.	40 F LED	1000 LM	40	490X275X80 mm	-10 / +60°C	3 W	220-240 V





S-BOX EMERGENCY EXIT SIGNS

- 180 min. time in case of Emergency
- Production with Led.
- Ni-Cd Battery
- Electrostatic powder paint sheet metal case
- One-Sided and Double-Sided Production
- Charger LED

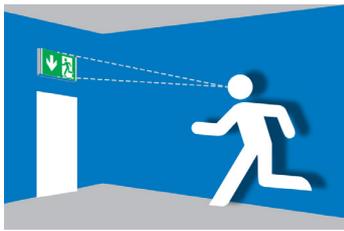

- Designed for routings that can be used in ceilings, walls and overhead door applications conforming to standards.
- Test Button
- CE , ISO 9001:2015 Certificate
- 2-Year Guarantee
- In accordance with EN 60598-1 , EN 60598-2 22 standart.

Model	Height (h)	Usable Distance
S-Box 30 cm	2.00 m	28.00 m
S-Box 40cm	2.00 m	32.00 m
S-Box 48cm	2.00 m	36.00 m
S-Box 65cm	2.00-4.00 m	50.00 m




MODEL	WAY OF WORK	LIGHTING TIME	LIGHTING POWER	LUMEN	IP CLASS	SIZE	WORKING TEMPERATURA	POWER CONSUMPTION	VOLTAGE
65180 One-Sided	CONTINUOUS & EMERGENCY	60 MIN.	40 F LED	1000 LM	40	660X381X85 mm	-10 / +60°C	3,5 W	220-240 V
65180 One-Sided	CONTINUOUS & EMERGENCY	180 MIN.	40 F LED	1000 LM	40	660X381X85 mm	-10 / +60°C	3,5 W	220-240 V
65180 Double-Sided	CONTINUOUS & EMERGENCY	60 MIN.	40 F LED	1000 LM	40	660X381X85 mm	-10 / +60°C	3,5 W	220-240 V
65180 Double-Sided	CONTINUOUS & EMERGENCY	180 MIN.	40 F LED	1000 LM	40	660X381X85 mm	-10 / +60°C	3,5 W	220-240 V




TECHNICAL DRAWINGS


TWINLIGHT
2x14 - 2x30 Led

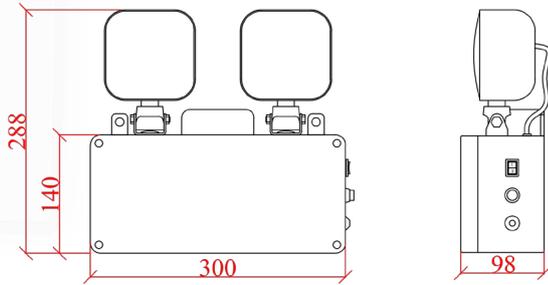


TWINLIGHT POWER

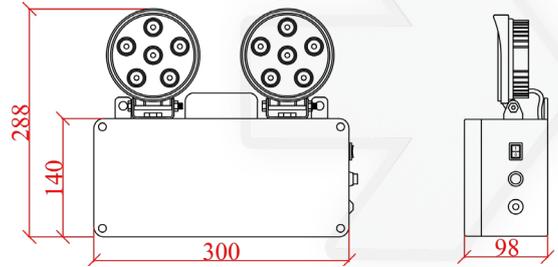


SAFELIGHT
2x18 - 2x36 Led

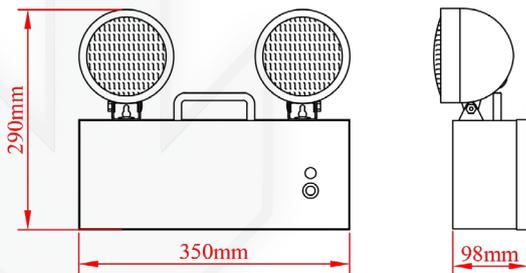


SAFELIGHT POWER

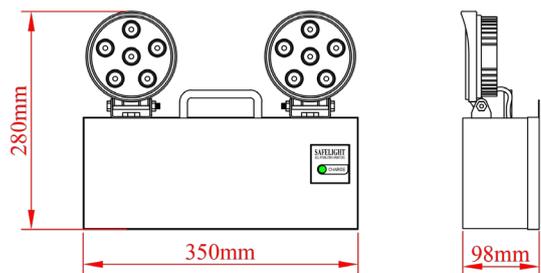


SAFELIGHT
3x18 - 3x36 Led

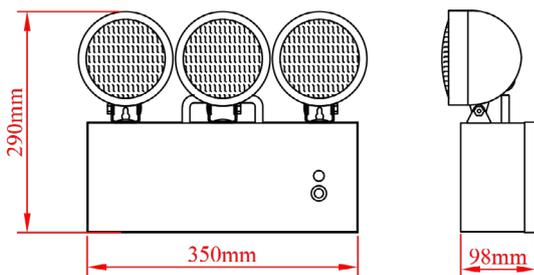


SAFELIGHT ECO
2x30

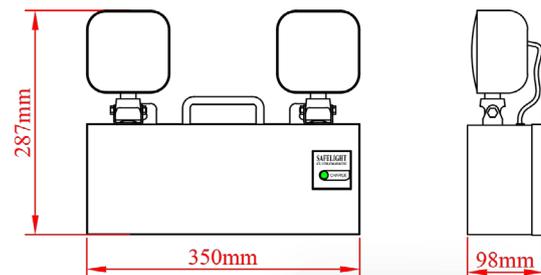

SAFELIGHT IP65

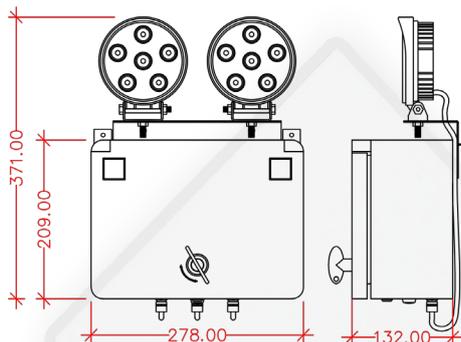


SAFELIGHT ECO
3x30 Led

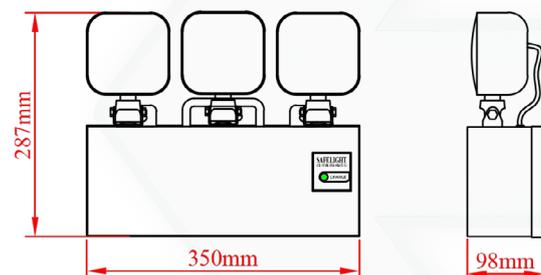

TECHNICAL DRAWINGS


Z - LITE
EMERGENCY LIGHT

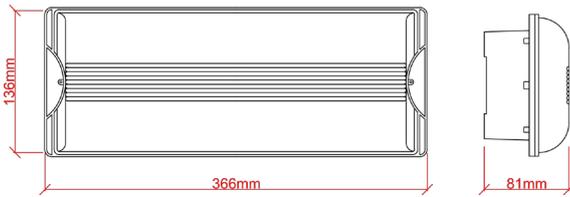


Z - LITE
EMERGENCY EXIT SIGNS




DEEP-LIGHT

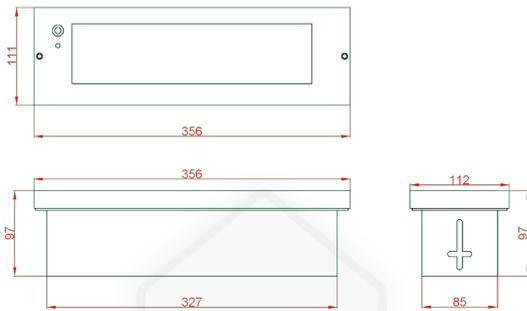

S-BOX

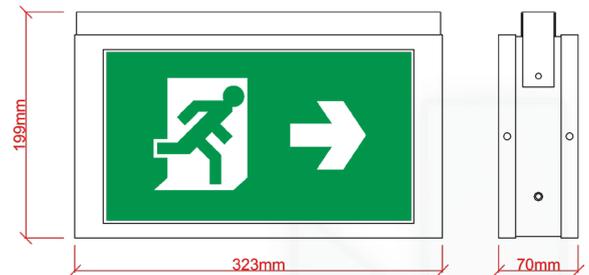


S-LITE
26 Cm - 30 Cm

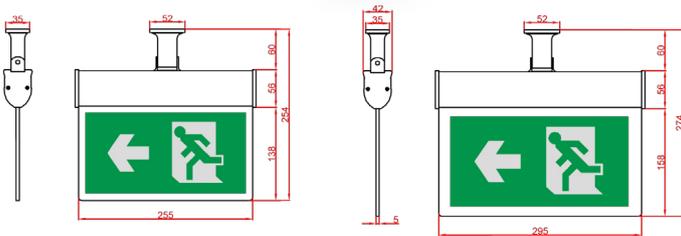


S-BOX
65Cm









S-LITE
39 Cm - 45 Cm

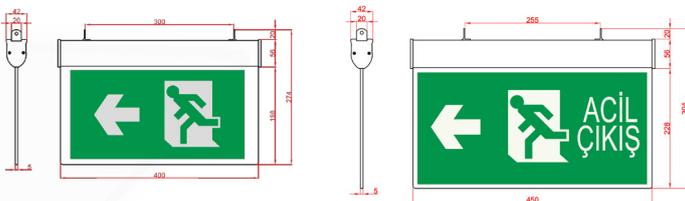

S-BOX
30 Cm - 40 Cm - 48 Cm

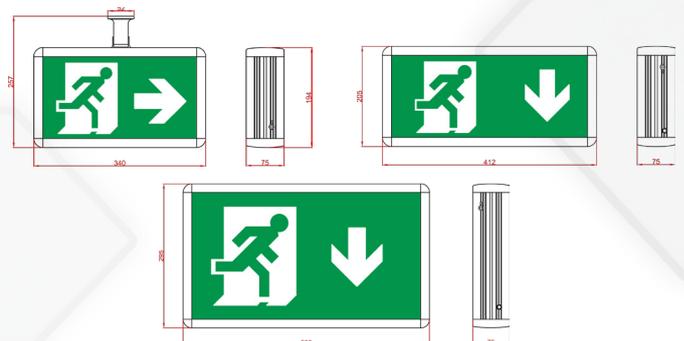

APPLICABLE FIGURES

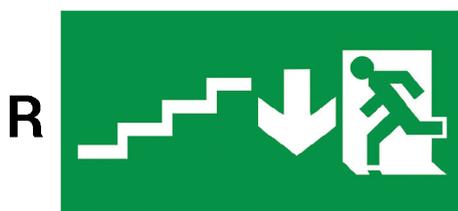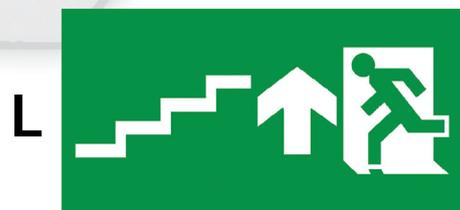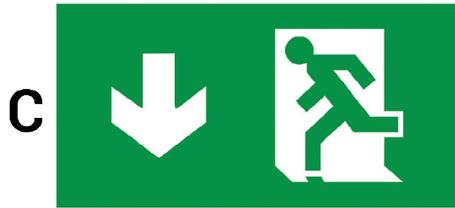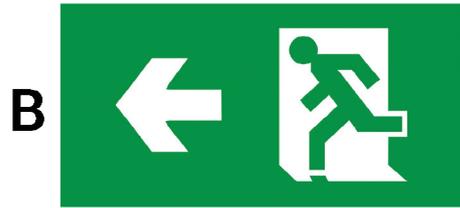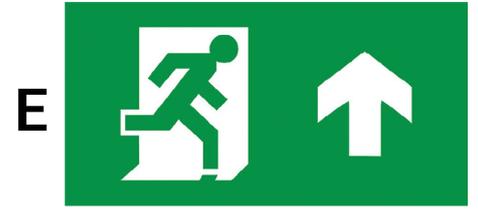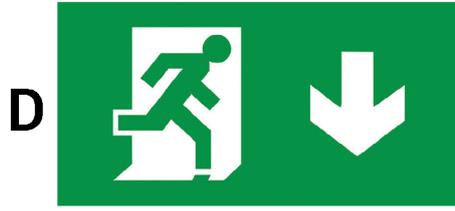

OUR APPLICATIONS



İMZA YANGIN ALGILAMA SIST.
OTOMASYON SAN. VE TIC. LTD.ŞTİ

Adres : Yeşiltepe Mah. Yavuz Selim Blv. No:
391/A Ortahisar / TRABZON
Tel : **+90 462 229 99 99**
Fax : **+90 532 277 07 64**
E - Mail : info@imzayangin.com
Web : www.imzayangin.com